


Form-Fill-Seal Wrappers *F5ADA with Drop-through Infeed*


Fully automatic Shanklin® FloWrap machines are continuous motion horizontal Form-Fill-Sealers designed to wrap packages effortlessly and efficiently. Built for peak performance, durability, and versatility, each FloWrap model includes numerous standard features and options that allow customization to application.

- Fully automatic operation - For maximum speed and efficiency. Speed is adjustable at control console.
- Versatile - Handles irregular shapes; product registration mode facilitates running of opaque films.
- Solid performance - Produces 50-75 packages per minute (depending on application).
- Easy to use - Programmable controller with user-friendly touch-screen control panel for ease of set-up, operation and maintenance; includes help diagnostics tool that automatically displays machine faults and corrective actions at the push of a button.
- Easy changeover— Adjustable product spacing and end seal placement accommodate product length and spacing changes for fast and simple product size changeover.
- Safe— Electrical controls are UL-listed for meeting the highest safety standard.

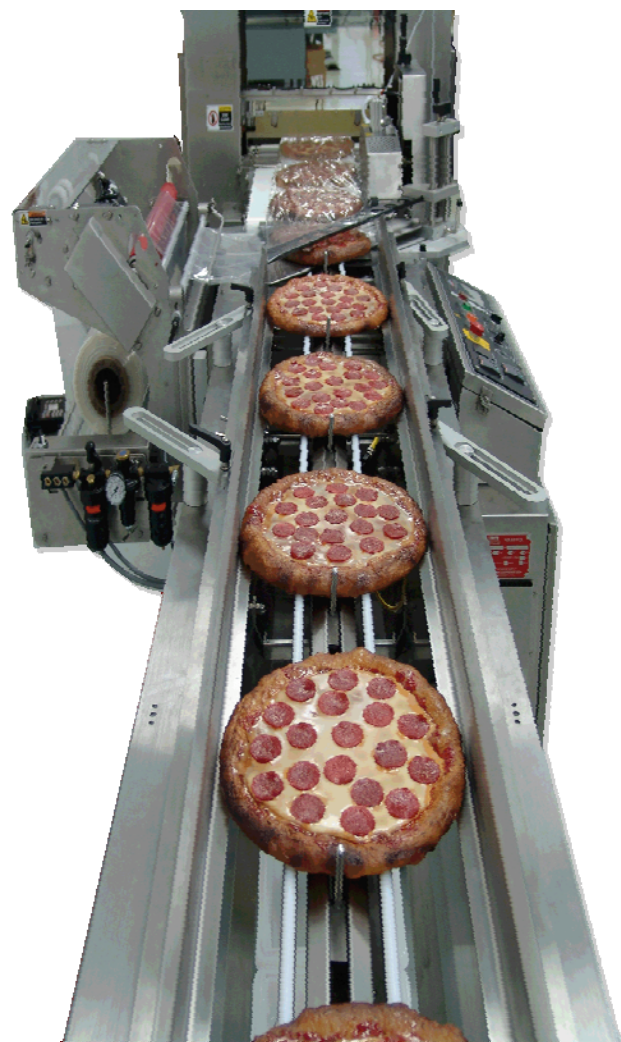

Drop-through Infeed

- Allows food fragments to fall through the infeed conveyor and land on the floor or in the optional collection buckets.
 - Eliminates Build-up on Infeed
 - Maximizes Uptime and Sanitation
- Removable Wash Down Infeed allows customers to remove the infeed from the wrapper for routine cleaning.
- Great for Pizza and other unstable food product applications!

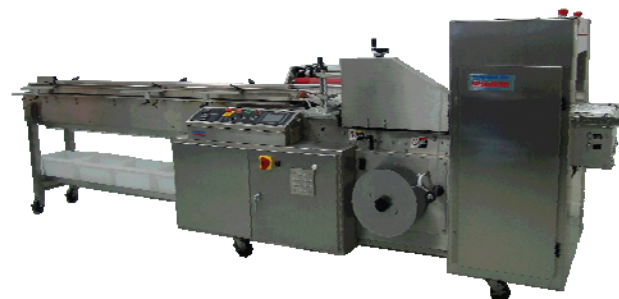

Shanklin® F5ADA with Drop-through Infeed Specifications

This efficient side-sealing wrapper shrinkwraps product with neat trim seals on three sides of the package, handling even irregular shapes with ease. The inverting heads do not require a precise matching of film width, thus allowing you to run many sizes of packages with only a moderate selection of film widths.

Model F-5ADA	
Package Size	Min: 2 1/2" W x 1/8" H x 3" L Max: 16" W x 6" H x 48" L Optional 8" height Optional 23" width Width and Height combination cannot exceed maximum film width
Max. film width	22" folded or 44" flat
Conveyor height	41 1/4" with casters
Package speeds	75 packages per minute
Film speeds	90 linear ft/min. maximum
Longitudinal seal	Weld bead at side of package
Transverse seal	SmartWire or hot knife jaws standard. Polyethylene jaws available.
Main drive	3/4 HP DC motor with variable speed control
Power	230 Volts, 20 Amps, 60 Hz, 1 phase
Compressed air	1/2 C.F.M. free air at 60 psi
Safety devices	Emergency stop button instantly stops all machine functions until manually reset Air cylinder safety opens end seal jaws Low voltage sensors and actuators Multiple safety interlocks Torque limiters on main drive and infeed conveyor Tamper-resistant controls

Contact us at 978-772-3200 or www.shanklincorp.com



Shrink Packaging
100 Westford Road
Ayer, MA 01432
978-772-3200 Fax: 978-772-5660
www.shanklinparts.com

Distributed by:

Corporate Offices: Sealed Air Corporation
200 Riverfront Blvd, Elmwood Park, NJ 07407 www.sealedair.com

Our Products Protect Your Products®

© Reg. U.S. Pat. Off. © Sealed Air Corporation 2008. All Rights Reserved. Printed in the USA.
The "9 Dot Logo" and "Sealed Air" are registered trademarks of Sealed Air Corporation (US).