



Automated Package Void Containment System

The Ultipack® system automates the process of corrugated tray forming. The wedging module inserts a flexible corrugated blank (the wedge) in the tray, locking items in place and a lid is automatically sealed in place.

IDEAL FOR FULFILLMENT APPLICATIONS

The Ultipack® system is designed for fulfillment operations where the goal is to minimize costs – shipping, consumables, and operating — while optimizing productivity.

INCREASE FULFILLMENT VELOCITY


- Fully-automated, integrated solution
- Industry-best throughpu
- The perfect material amount is used every time, eliminating was
- Material can be sourced local

IMPROVE CUSTOMER EXPERIENCE

- Package is neat and easy to o
- Innovative packaging solution enhances brand image
- Custom print to convey brand image

REDUCE DAMAGE

- Patented package construction
 keeps items secure in transit
- Additional cushioning can be auto-inserted when you need it

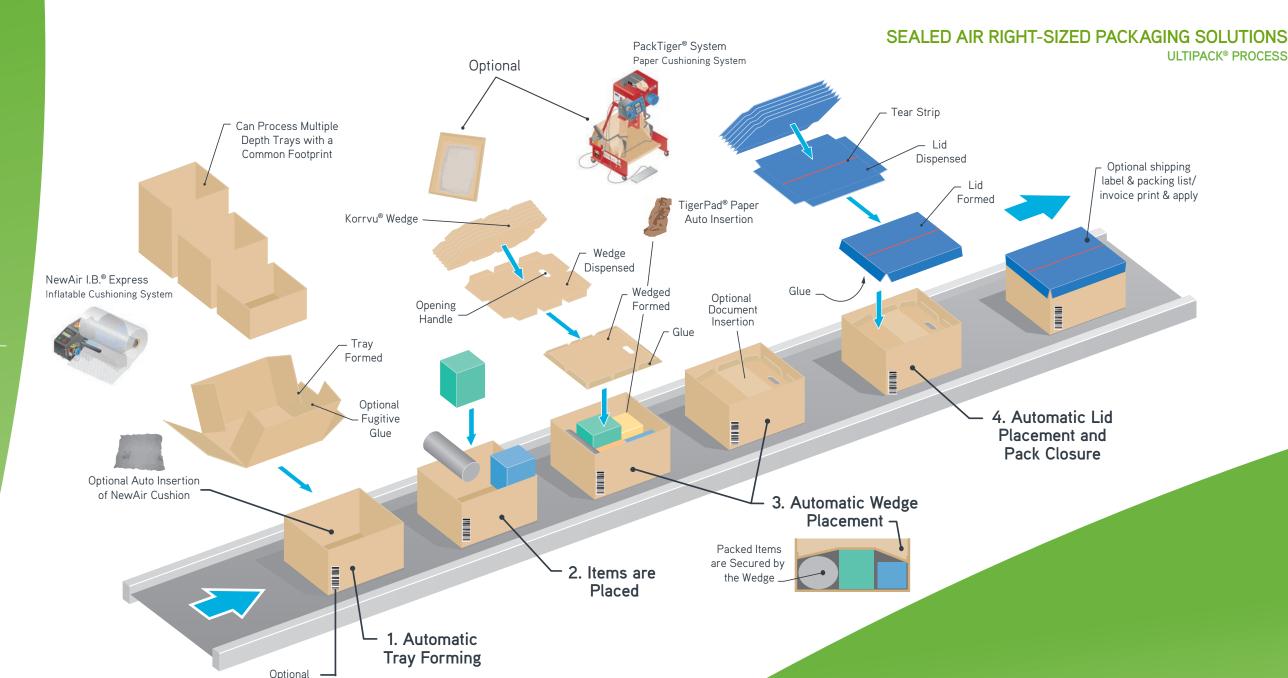

License Plate

Ultipack® System Protects

CREATE AN UNRIVALED CUSTOMER EXPERIENCE

Sealed Air's dedicated team of packaging professionals will work with you to design the custon Ultipack® system solution that will meet the needs of your customers, and your packaging operation, adding value long after the carton is sealed.

ENHANCED IMAGE

Sustainable Solution

• The 100% corrugated package is "curb-side" recyclable.

Excellent Customer Experience

 The finished appearance of the package enhance brand image.

Unique Packaging Possibilities

 The three pieces of the package can be printed differently.

Easy to Ope

The built-in tear strip makes opening an easy pull.



Ultipack[®] **Automated** Solution

Automated Packaging Solution


<u>Automated</u> Package Void Containment System

PAKFORMANCE™ REMOTE REPAIR

The PakFormance™ system allows remote service with Sealed Air's I-Pack® and Ultipack® packaging automation systems.

The PakFormance™ system offers a wide range of benefits that include monitoring capabilities for quick detection of problems, process automation for labor savings, product flow control, product tracking and traceability, remote maintenance, and powerful analysis and reporting tools.

TYPICAL APPLICATION

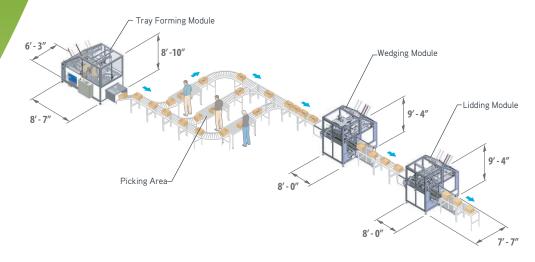

SPECIFICATIONS/REQUIREMENTS Throughput Dimensions (LxWxH) Weight Electrical Req. Air Req. Tray Forming 18-24 tray/min 8'- 7" x 6'- 3" x 8'- 10" 2,870 lbs. 230 or 460 VAC ~ 3 Phase 87 psi Module 30 Amp 50/60 Hz 4 cfm 2,870 lbs. 230 or 460 VAC ~ 3 Phase 87 psi Wedging 8-10 wedges/min 7'- 7" x 8'- 0" x 9'- 4" 50/60 Hz 29 cfm Module 30 Amp 7'-7" x 8'- 0" x 9'- 4" 230 or 460 VAC ~ 3 Phase Lidding 8-18 lids/min 2,870 lbs. 30 Amp Module 50/60 Hz 5 cfm Up to 150/min 34" x 27" x 59" 309 lbs. 110 - 120 VAC ~ 1 Phase Pack Tiger® n/a w/o roll 9.1 Amp 50/60 Hz NewAir I.B.® 65lf/min 2' - 5" x 2' - 2" x 1' - 7", 81 lbs. 100 - 120 VAC ~ 1 Phase n/a .74m x .66m x .48m Express w/o roll 3 Amp Korrvu® Interchangeable with corrugated wedge





1-800-648-9093 SealedAir.com/product-care





Corporate Office: Sealed Air Corporation (US) 8215 Forest Point Boulevard, Charlotte, NC 28273

www.sealedair.com

© 2016. Sealed Air Corporation. All Rights Reserved. Printed in the U.S.A. Ultipack®, NewAir I.B.® Express, Korrvu®, PackTiger®, TigerPad®, PakFormance™, and the Sealed Air & Trillian Design™ are trademarks of Sealed Air Corporation (US). D-207 05/16